


BACK CONNECTED PROCESS PORTS

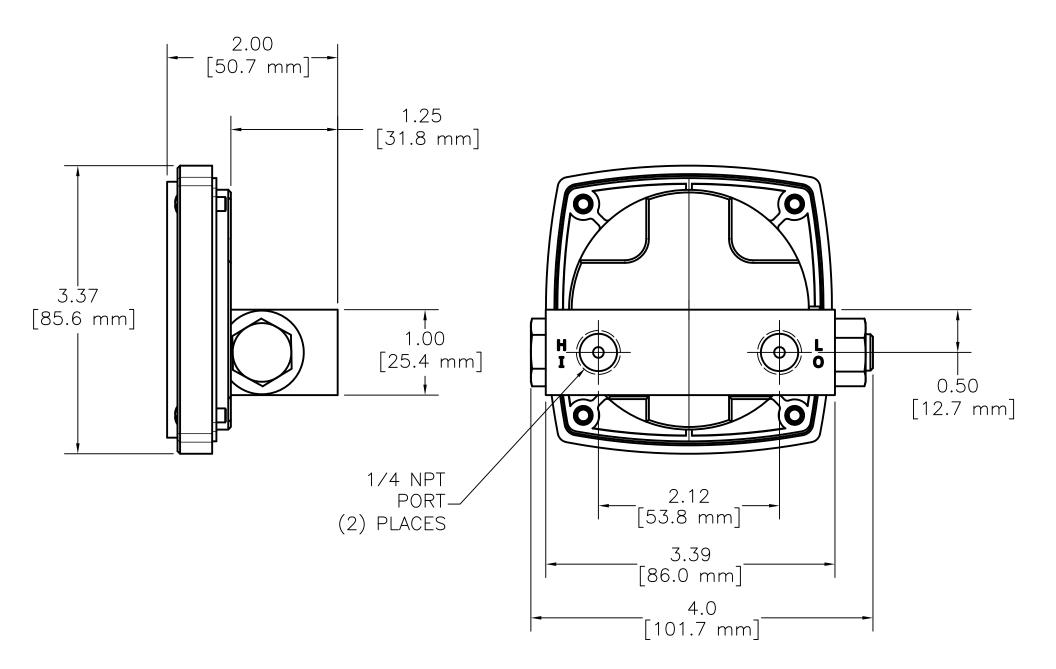



END CONNECTED PROCESS PORTS

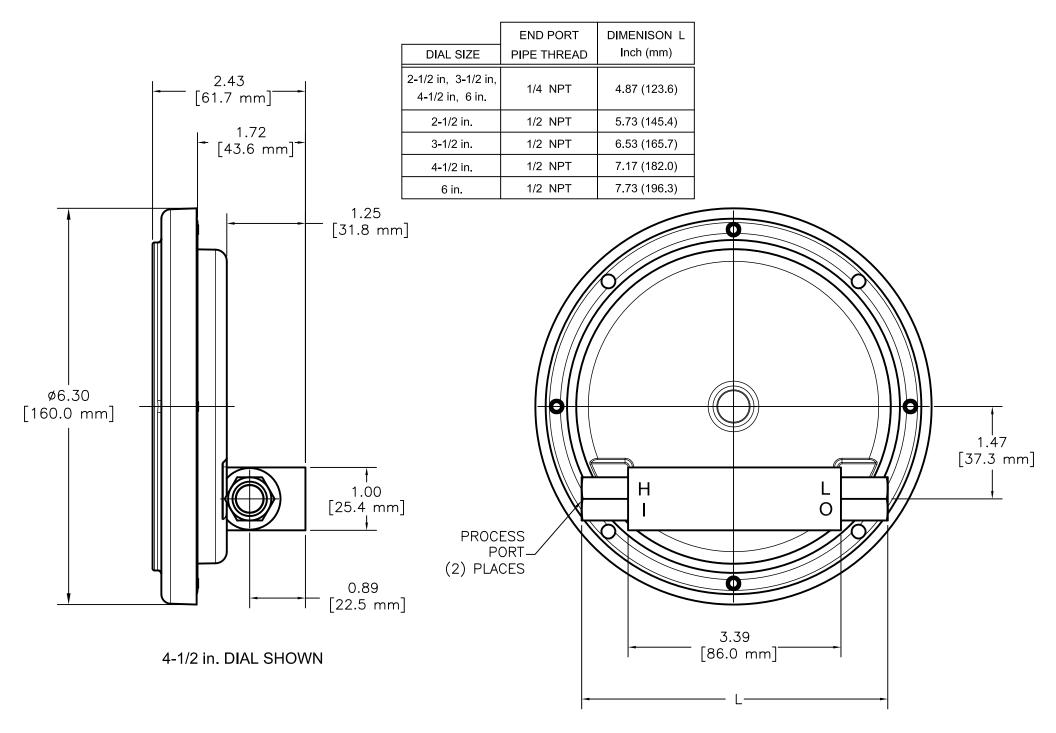


MODEL 124 END CONNECTED WITH ELECTRICAL (4-1/2 INCH DIAL SHOWN)









	END PORT	DIMENISON L
DIAL SIZE	PIPE THREAD	Inch (mm)
2-1/2 in, 3-1/2 in, 4-1/2 in, 6 in.	1/4 NPT	4.87 (123.6)
2-1/2 in, 3-1/2 in, 4-1/2 in, 6 in.	1/2 NPT	5.73 (145.4)




MODEL 124 BACK PORTS WITH ELECTRICAL (2-1/2 INCH DIAL SHOWN)

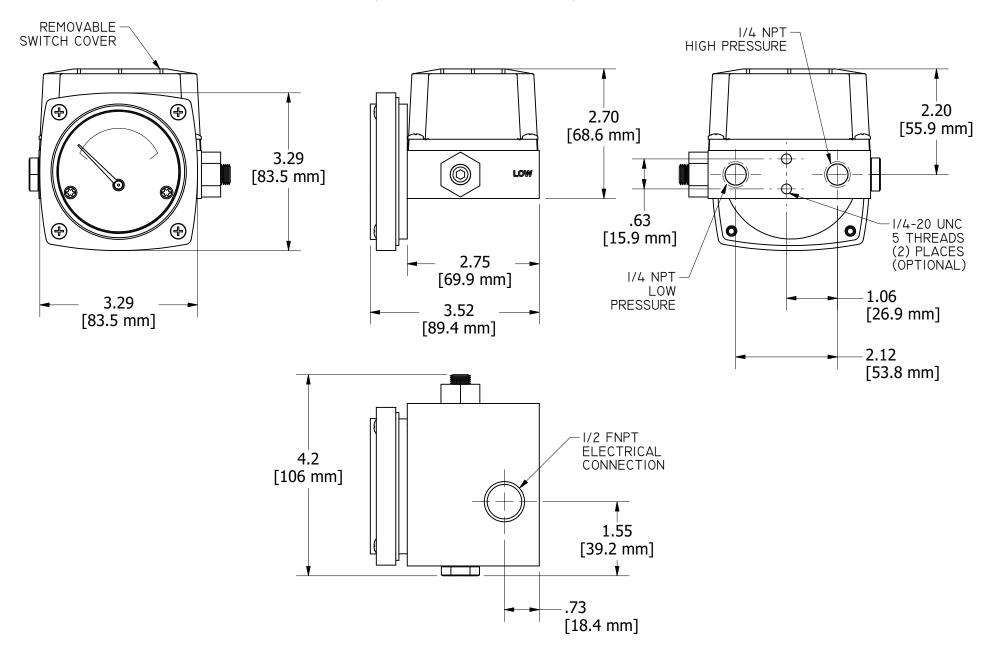


1/4-20 UNC BACK MOUNTING HOLES

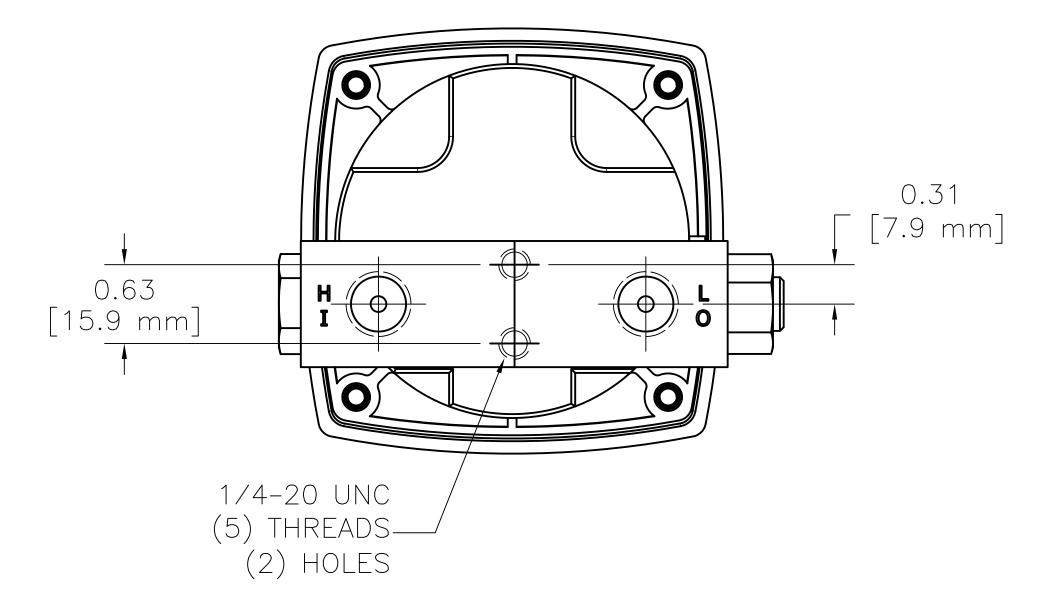


2 INCH PIPE MOUNT (FOR VERTICAL OR HORIZONTAL PIPE)

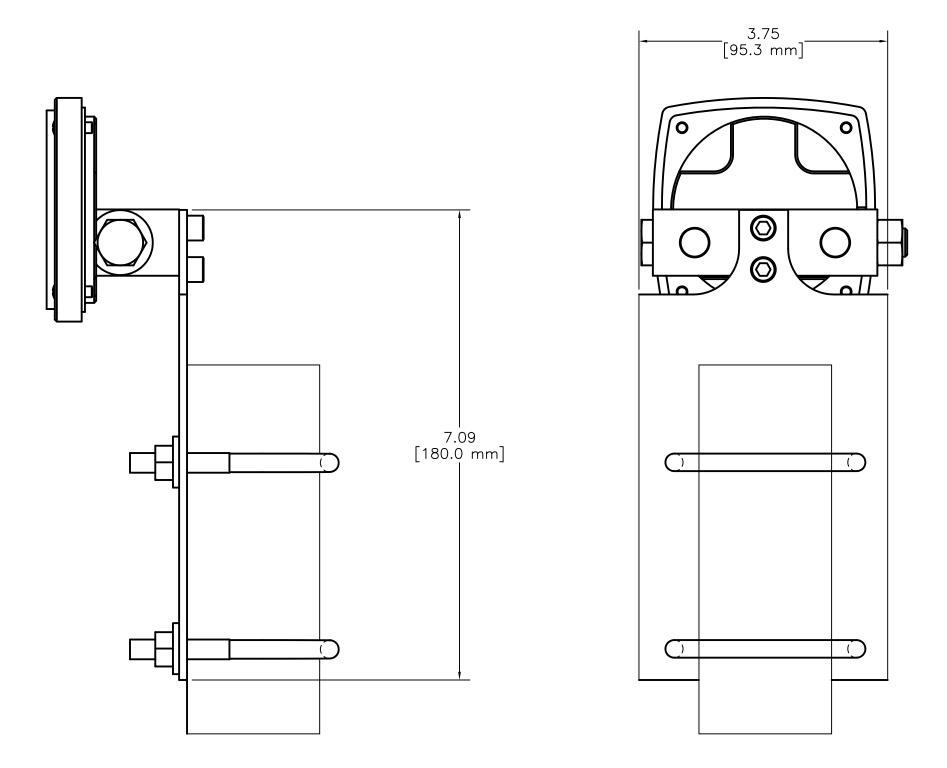


MODEL 124 ELECTRICAL WITH PIPE MOUNT (4-1/2 ALUMINUM FRONT SHOWN)

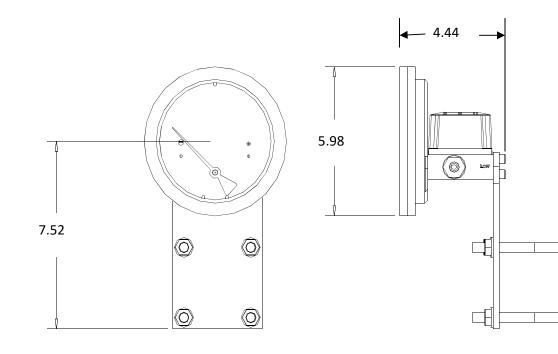


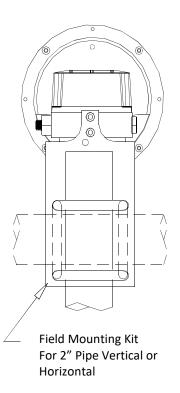


WALL MOUNT BRACKET (END CONNECTED PORTS)

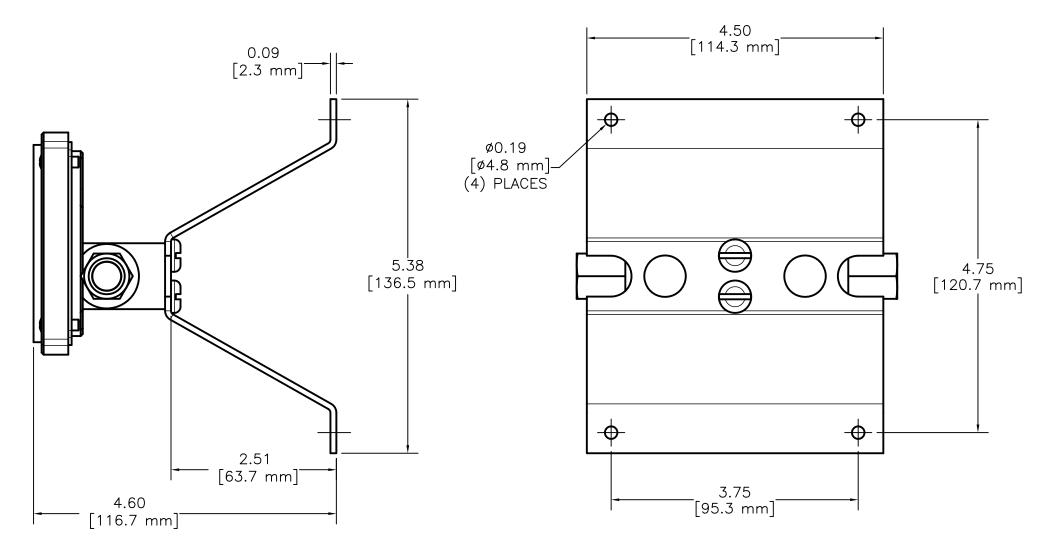


MODEL 124 WALL MOUNT WITH ELECTRICAL

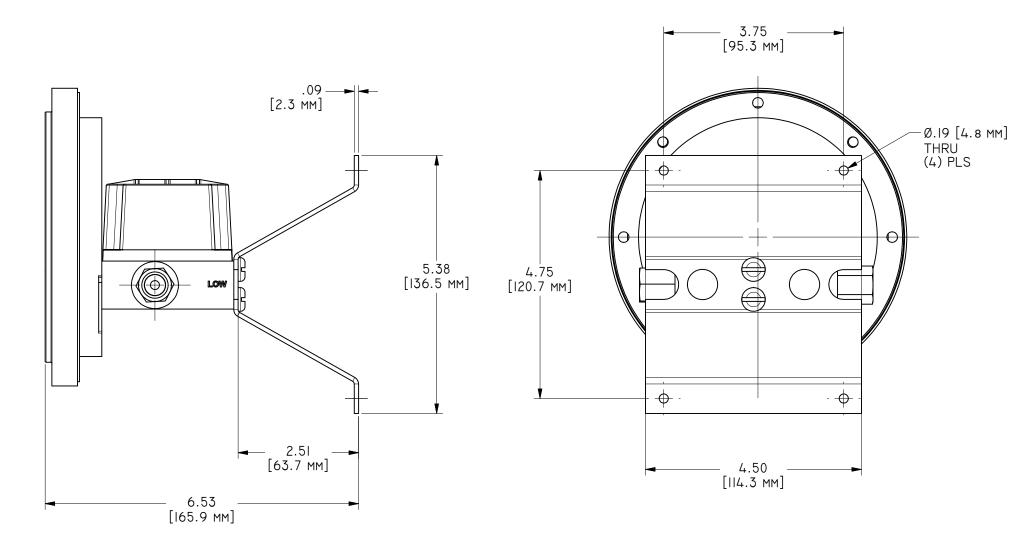

MODEL 124 PANEL CUT-OUT DIMENSIONS



		DIAMETER C	DIAMETER H
DIAL SIZE	Inch (mm)	Inch (mm)	Inch (mm)
2-1/2 in	3.00 (76.2)	3.50 (88.9)	0.19 (4.7)
4-1/2 in.	5.30 (134.6)	5.63 (143.0)	0.19 (4.7)
6 in.	6.50 (165.1)	7.00 (177.8)	0.19 (4.7)

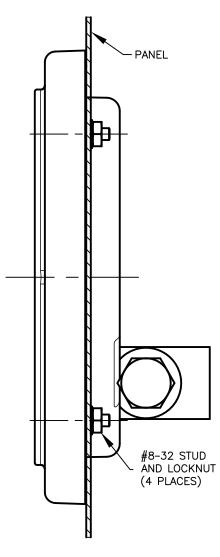

/ PANEL

